






IT Netzwerktechnik Tim Kesler
www.nambo.eu



MPTL Premium 90 degree angle Cat 6A STP Field Termination Plug Toolless screw Type upwards openable

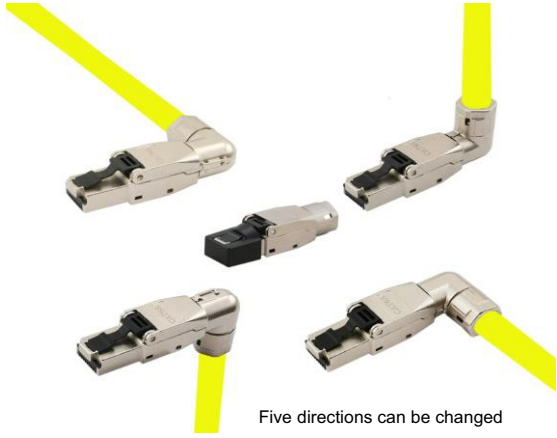

Five directions can be changed

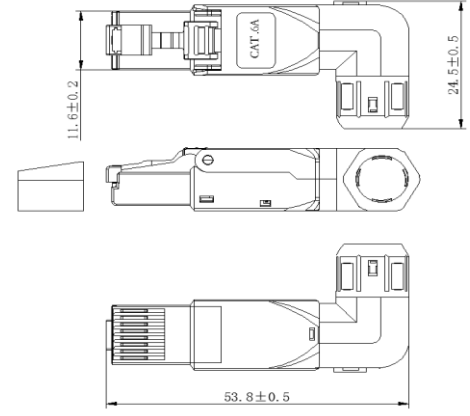

Feature

- Fast and easy tool-free installable shielded RJ 45 Connector, can be assembled in 60 seconds without any special tools
- Fully shielded Zinc Diecast Housing ensures best EMC effect especially in industry environment
- IDC Phosphor bronze tin plated PIN needle can be reused 5 times(Min)
- PC plastic parts provide better elasticity and durability
- Compliant to Generic cabling standards-ANSI-TIA568.2-D MPTL requirements •IEC60603-7 and PoE per IEEE 802.3af,PoE+ per IEEE 802.3at
- Compact cable manager for round Solid cable AWG22/1-26/1(1/0.65-1/0.04mm) and stranded cable AWG22/7-26/7 For cable OD:5.0-8.5mm
- four-chamber wire manager (available with colour code T568A or T568B and PROFINET)
- 90 degree angle, Five directions can be changed
- L×W×H:54×24.5×12.46mm

STANDARDS

- ISO/IEC 11801 Ed.2.2:2011-06
- DIN EN 50173-1:2011-09
- TIA/EIA-568-C.2 (2009-08)
- IEC 60603-7-5 Ed.1 (12/2008)
- ROHS 2.0 and Reach compliant.

DESCRIPTION

Housing	Zinc alloy
IDC TERMINAL	PC TERMINAL:PHOSPHOR BRONZE,TIN PLATING
RJ 45 JACK	PHOSPHOR BRONZE 8P8C GOLD PLATED
PCB	FR-4 1.2mm UL 94V0
RJ45 Contact Life	750 Times Min
Plug inforce	<30N
PoE	PoE per IEEE 802.3af, PoE+ per IEEE 802.3at PoE++ per IEEE 802.3bt
Conductor diameter:	Solid 0.40 - 0.65 mm AWG 26/1 - AWG 22/1,Stranded cable AWG22/7-26/7
Cable diameter:	5.0-8.5mm

Environment

Operating temperature:	-10~+60℃
Storage temperature:	-40~+70℃
Operation humidity:	10%~85%
Storage humidity:	10%~85%

Application

Suitable for CAT.6A, CAT.7, CAT.7A SFTP LAN Cable
The product is widely used in industrial Internet and visual inspection system and monitoring system and Network communication system

Application:



Item No.
S138

Color
Black+Silver

Package
1pc/PE Bag+Nambo Label

Data sheet : S138