




IT Netzwerktechnik Tim Kesler
www.nambo.eu

90 degree angle Cat 8.1/Class I STP Field Termination Plug Toolless screw Type upwards openable

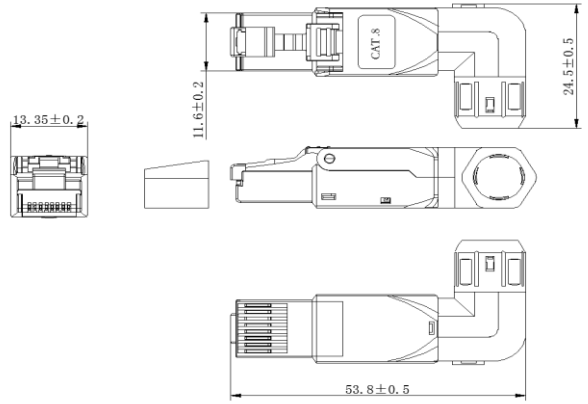

Feature

- Fast and easy tool-free installable shielded RJ 45 Connector, can be assembled in 60 seconds without any special tools, and multi-port capable
- Fully shielded Zinc Diecast Housing ensures best EMC effect especially in industry environment
- IDC Phosphor bronze tin plated PIN needle can be reused 5 times(min)
- PC plastic parts provide better elasticity and durability•Color Silver
- Cat.8.1/Class I performance according to ISO/IEC 11801-1:2017 (Ed.1.0) and IEC60603-7
- Backward compatible with CAT.6A
- Compact cable manager for round Solid cable AWG22/1-26/1(1/0.65-1/0.4mm) and stranded cable AWG 22/7-26/7 For cable OD:5.0-8.5mm
- four-chamber wire manager (available with colour code T568A or T568B and PROFINET)
- Degree of protection IP20
- with black dust Cup
- 90 degree angle, Five directions can be changed
- L×W×H:54×24.5×12.46mm

STANDARDS

- ISO/IEC 11801-1:2017 (Ed.1.0)
- ANSI/TIA-568-C.2-1
- IEC 60603-7
- ROHS 2.0 and Reach compliant.

DESCRIPTION

Housing	Zinc alloy
IDC TERMINAL	PC TERMINAL:PHOSPHOR BRONZE,TIN PLATING
RJ 45 JACK	PHOSPHOR BRONZE 8P8C GOLD PLATED
PCB	FR-4 1.2mm UL 94V0
RJ45 Contact Life	750 Times Min
Plug inforce	<30N
PoE	PoE per IEEE 802.3af, PoE+ per IEEE 802.3at PoE++ per IEEE 802.3bt
Conductor diameter:	Solid 0.40 - 0.65 mm AWG 26/1 - AWG 22/1, Stranded cable AWG22/7-26/7
Cable diameter:	5.0-8.5mm

Environment

Operating temperature:	-10~+60°C
Storage temperature:	-40~+70°C
Operation humidity:	10%~85%
Storage humidity:	10%~85%

Data sheet : S139

Application

Suitable for CAT.8, CAT.7A, CAT.7, CAT.6A, SFTP LAN Cable
The product is widely used in industrial Internet and visual inspection system and monitoring system and Network communication system

Application:



Cat 8.1 SFTP Patch cord

Item No.
S139

Color
Black+Silver

Package
1pc/PE Bag+Nambo Label